

PRODUCT SPECIFICATION BOOK

www.archilume.com

archilume

INDEX

archilume

PENDANTS	1
P1	2
P1M	3
P2A	4
P3A	5
P4A	6
P5A	7
P1 Alto	8
P1M Alto	9
P1 Aura	10
P1M Aura	11
P1 Ovolo	12
P1M Ovolo	13
P1 Balance	14
P2 Balance	15
P1 Trapeze	16
CONFIGURATE MODULAR CANOPY SYSTEM	17
P1C Configurate	18
P1C Alto	19
P1C Aura	20
P1C Ovolo	21
P1D Configurate	22
P1D Alto Configurate	23
P1C Aura	24
P1D Ovolo	25
P1T Configurate	26
P1T Alto Configurate	27
P1T Aura Configurate	28
P1T Ovolo	29
CHANDELIERS	31
P8	32
P8A	33
P6L	34
P8L	35
P11L	36
P28	37
P30	38
WALL	39
W1D	40
W1U	41
W2D	42
W2U	43
W2UD	44
W4	45
Drivers	47
D8 150 (0-10V)	48
D8 250 (0-10V)	49
D8 700 (0-10V)	50

PENDANTS

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)



Light Distribution Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne

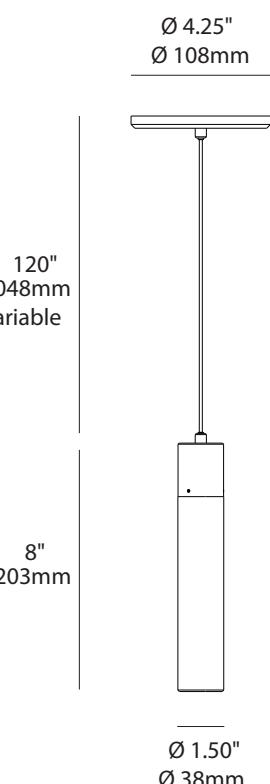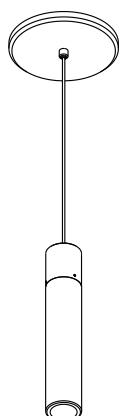

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to ceiling structure. 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)



Light Distribution Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1M-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne

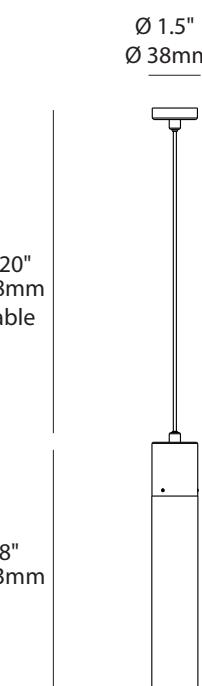

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution
Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P2A-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne



SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)



Light Distribution
Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P3A-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne

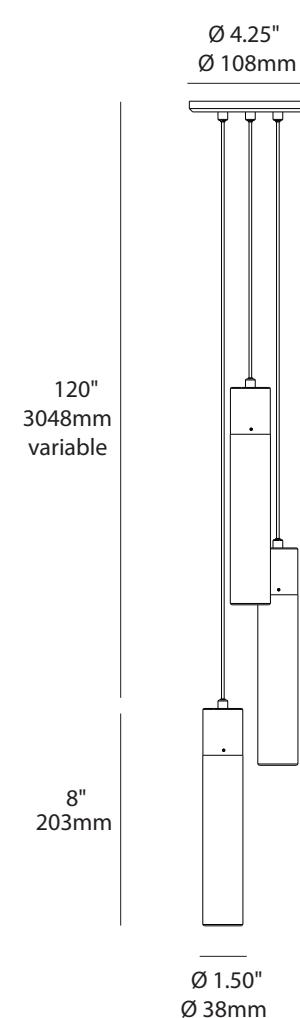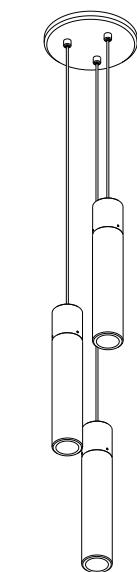

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P4A-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne

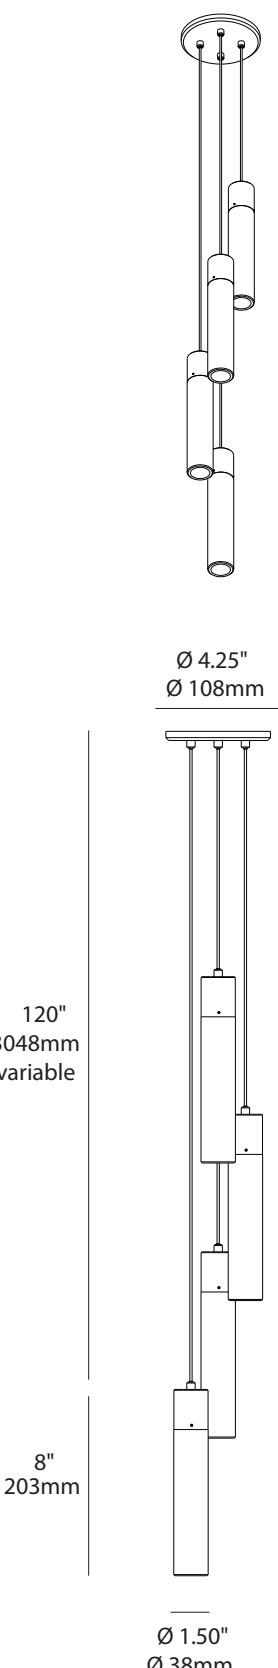

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P5A-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne

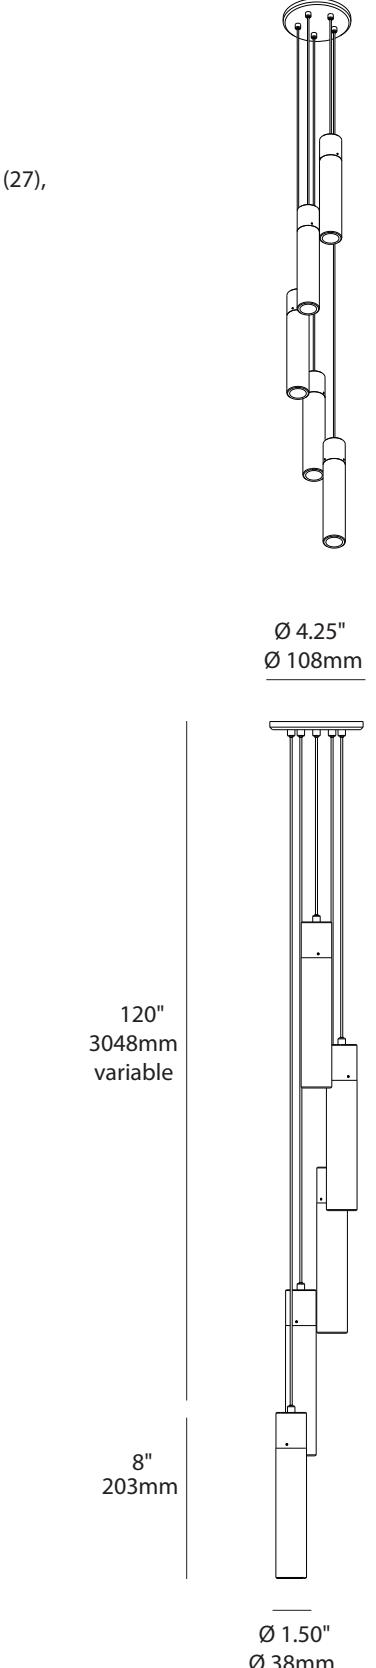

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1-AL-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

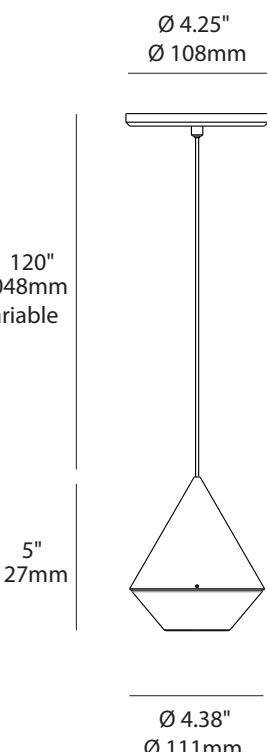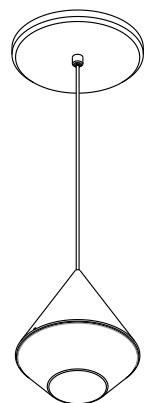

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to ceiling structure. 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1M-AL-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

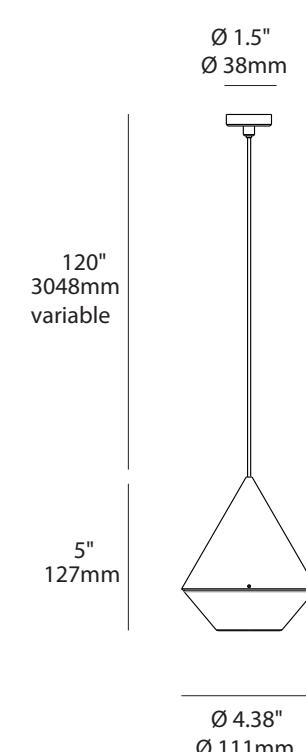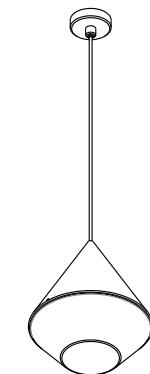

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1-AU-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

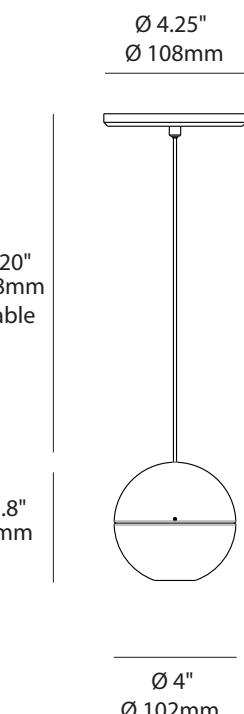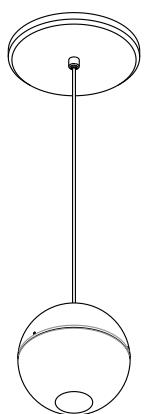

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1M-AU-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

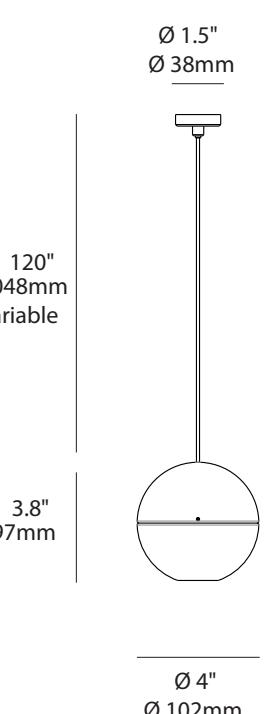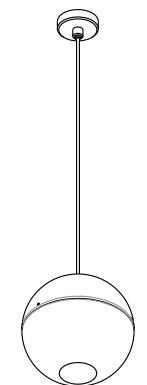

SPECIFICATION

Description: Human centric OLED decorative pendant mount luminaire with machined aluminum housing and naturally diffuse light source.

Lamping: 3 watt dimmable OLED, 200 lumens, 3000K (30), 90 CRI, R9 >50. OLED is a light source that provides soft yet bright full spectrum illumination resulting in an artificial light that resembles daylight.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_150 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution: Soft brightness naturally diffuse light source

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_150 series drivers.


Order Code: P1-OV-_____
30 3000K S silver
B black
G gold
C champagne

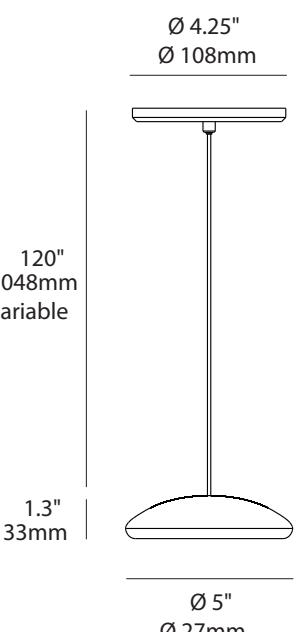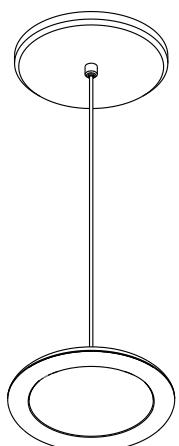

Ø 4.25"
Ø 108mm



120"
3048mm
variable



Ø 5"
Ø 27mm

SPECIFICATION

Description: Human centric OLED decorative pendant mount luminaire with machined aluminum housing and naturally diffuse light source.

Lamping: 3 watt dimmable OLED, 200 lumens, 3000K (30), 90 CRI, R9 >50. OLED is a light source that provides soft yet bright full spectrum illumination resulting in an artificial light that resembles daylight.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_150 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to ceiling structure. 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution: Soft brightness naturally diffuse light source

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_150 series drivers.


Order Code: P1M-OV-_____
30 3000K S silver
B black
G gold
C champagne

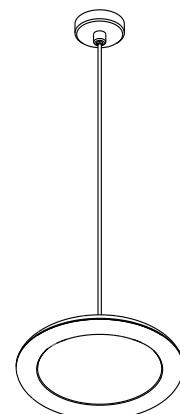

Ø 1.5"
Ø 38mm

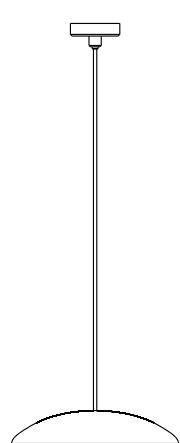

120"
3048mm
variable



Ø 5"
Ø 27mm

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1-BA-
27 2700K S silver CD clear lens diffuse aperture
30 3000K B black SD satin lens diffuse aperture
35 3500K G gold
C champagne

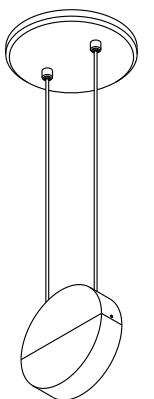

Ø 4.25"
Ø 108mm

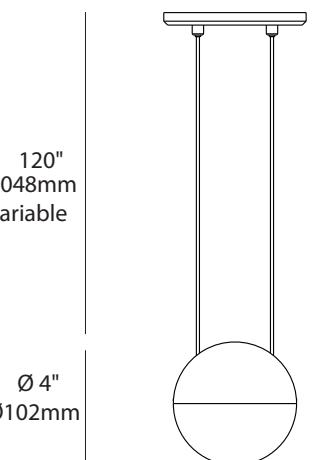

Ø 4"x1"
Ø 102mm x 25.4mm

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P2-BA-
27 2700K S silver CD clear lens diffuse aperture
30 3000K B black SD satin lens diffuse aperture
35 3500K G gold
C champagne

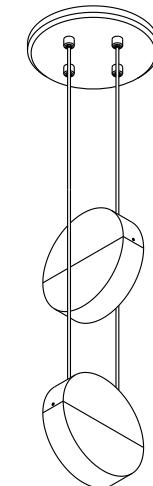

Ø 4.25"
Ø 108mm

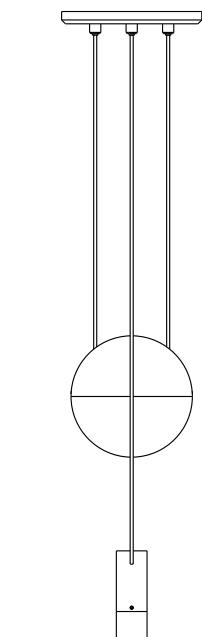

Ø 4"x1"
Ø 102mm x 25.4mm

P1_Trapeze

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.



Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1M-BA-_____ - _____ - _____
 27 2700K S silver CD clear lens diffuse aperture
 30 3000K B black SD satin lens diffuse aperture
 35 3500K G gold
 C champagne

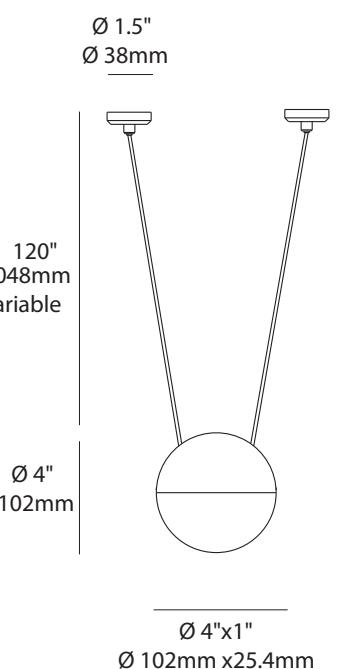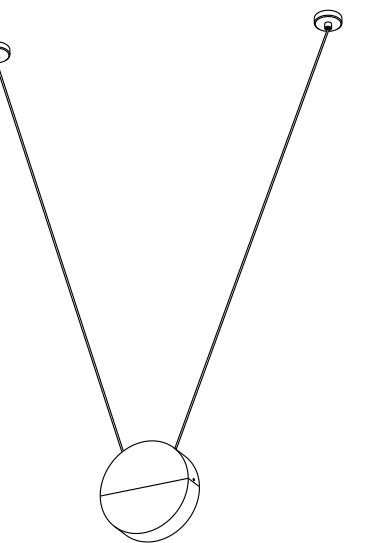

CONFIGURE
MODULAR
CANOPY
SYSTEM

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution Optics:



Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1C-_____ - _____ -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 BC blank C champagne leave blank for BC option

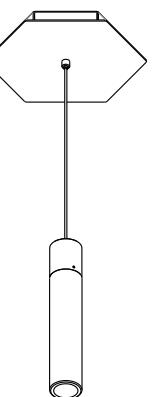



7.50" x 6.50"
191mm x 165mm

120"
3048mm variable

8"
203mm

Ø 1.50"
Ø 38mm

Blank Canopy



7.50"
191mm

6.50"
165mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1C-AL-_____ - _____ -
 3W warm dim S silver CD clear lens diffuse aperture
 27 2700K B black SD satin lens diffuse aperture
 30 3000K G gold
 35 3500K C champagne

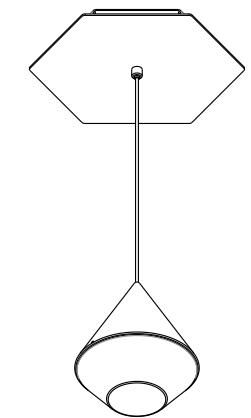



7.50" x 6.50"
191mm x 165mm

120"
3048mm variable

5"
127mm

Ø 4.38"
Ø 111mm

Blank Canopy



7.50"
191mm

6.50"
165mm

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1C-AU-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

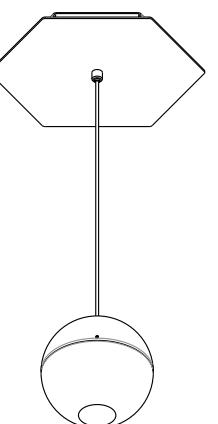


7.50" x 6.50"
191mm x 165mm

120"
3048mm
variable

3.8"
97mm

Ø 4"
Ø 102mm

Blank Canopy



7.50"
191mm

6.50"
165mm

Description: Human centric OLED decorative pendant mount luminaire with machined aluminum housing and naturally diffuse light source.

Lamping: 3 watt dimmable OLED, 200 lumens, 3000K (30), 90 CRI, R9 >50. OLED is a light source that provides soft yet bright full spectrum illumination resulting in an artificial light that resembles daylight.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_150 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution: Soft brightness naturally diffuse light source

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_150 series drivers.

Order Code: P1C-OV-
30 3000K S silver
BC blank B black
G gold
C champagne

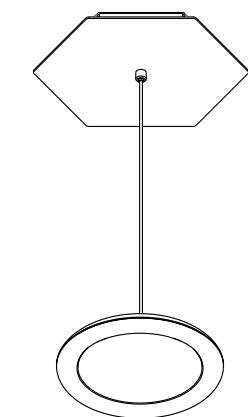


7.50"
191mm

120"
3048mm
variable

1.3"
33mm

Ø 5"
Ø 27mm

Blank Canopy



7.50"
191mm

6.50"
165mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)


Light Distribution Optics:


Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1D-_____ - _____ -

27 2700K	S silver	CD clear cylinder diffuse aperture
30 3000K	B black	SD satin cylinder diffuse aperture
35 3500K	G gold	CC clear cylinder concentric aperture
BC blank	C champagne	leave blank for BC option

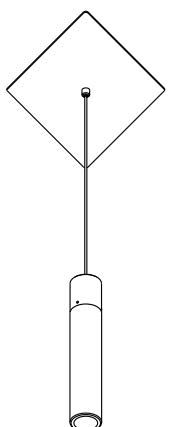


12.75" x 7.50"
324mm x 191mm

120"
3048mm
variable


8"
203mm

Ø 1.50"
Ø 38mm

12.75"
324mm



7.50"
191mm



SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).


Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1D-AL-_____ - _____ -

3W warm dim	S silver	CD clear lens diffuse aperture
27 2700K	B black	SD satin lens diffuse aperture
30 3000K	G gold	
35 3500K	C champagne	

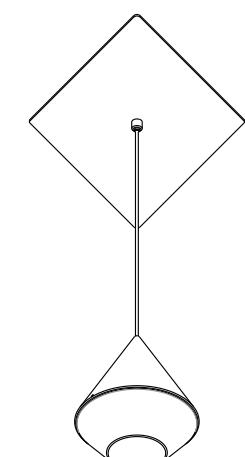


12.75" x 7.50"
324mm x 191mm

120"
3048mm
variable


5"
127mm

Ø 4.38"
Ø 111mm

12.75"
324mm



7.50"
191mm

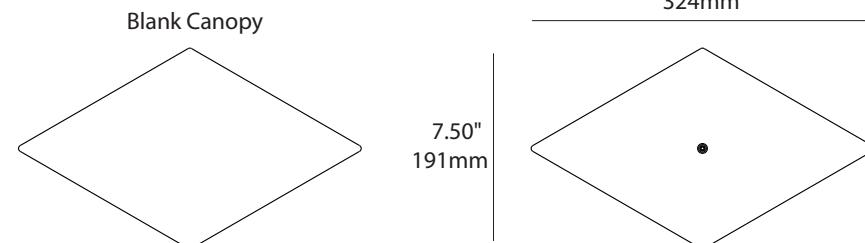

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1C-AU-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

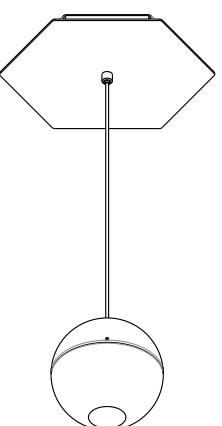


7.50" x 6.50"
191mm x 165mm

120"
3048mm
variable

3.8"
97mm

Ø 4"
Ø 102mm

Blank Canopy



7.50"
191mm

6.50"
165mm

SPECIFICATION

Description: Human centric OLED decorative pendant mount luminaire with machined aluminum housing and naturally diffuse light source.

Lamping: 3 watt dimmable OLED, 200 lumens, 3000K (30), 90 CRI, R9 >50. OLED is a light source that provides soft yet bright full spectrum illumination resulting in an artificial light that resembles daylight.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_150 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution: Soft brightness naturally diffuse light source

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_150 series drivers.

Order Code: P1D-OV-
30 3000K S silver
BC blank B black
G gold
C champagne

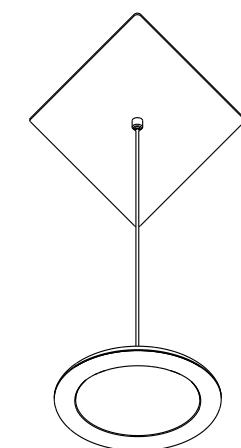


12.75" x 7.50"
324mm x 191mm

120"
3048mm
variable

1.3"
33mm

Ø 5"
Ø 27mm

Blank Canopy



7.50"
191mm

12.75"
324mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:
 
Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: P1T-_____ - _____ -
27 2700K S silver CD clear cylinder diffuse aperture
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
BC blank C champagne leave blank for BC option

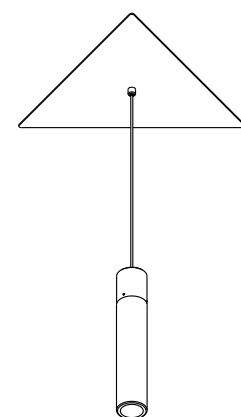

8.8" x 7.62"
224mm x 194mm

120"
3048mm
variable

8"
203mm

Ø 1.50"
Ø 38mm

Blank Canopy

11.08"
282mm

9.63"
245mm

•

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.


Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:
Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1T-AL-_____ - _____ -
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

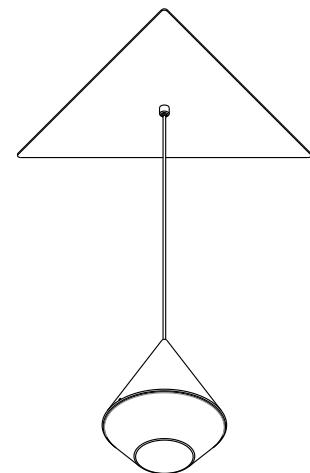

8.8" x 7.62"
224mm x 194mm

120"
3048mm
variable

5"
127mm

Ø 4.38"
Ø 111mm

Blank Canopy

11.08"
282mm

9.63"
245mm

•

P1T_Aura Configure

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K (3W) smooth CCT dimming transition. 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options are optional. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_250 series remote driver spec sheets for details.





Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture (CD) or optional satin light control lens with diffuse light distribution aperture (SD)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_250 series drivers.

Order Code: P1T-AU-
3W warm dim S silver CD clear lens diffuse aperture
27 2700K B black SD satin lens diffuse aperture
30 3000K G gold
35 3500K C champagne

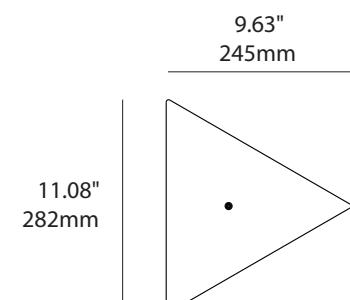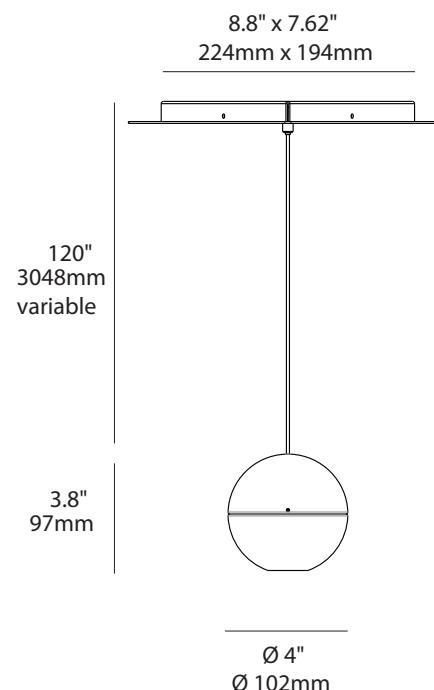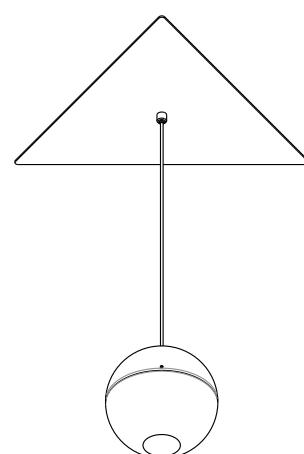

P1T_Ovolo

SPECIFICATION

Description: Human centric OLED decorative pendant mount luminaire with machined aluminum housing and naturally diffuse light source.

Lamping: 3 watt dimmable OLED, 200 lumens, 3000K (30), 90 CRI, R9 >50. OLED is a light source that provides soft yet bright full spectrum illumination resulting in an artificial light that resembles daylight.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_150 series remote driver spec sheets for details.





Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable. Blank canopies (BC) optional (sold separate).

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution: Soft brightness naturally diffuse light source

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_150 series drivers.

Order Code: P1T-OV-
30 3000K S silver
BC blank B black
G gold
C champagne

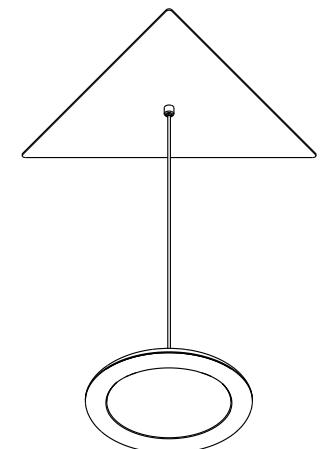

CHANDELIERS

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution
Optics:





Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: P8-

27 2700K	S silver	CD clear cylinder diffuse aperture	010 0-10V dimming
30 3000K	B black	SD satin cylinder diffuse aperture	
35 3500K	G gold	CC clear cylinder concentric aperture	
C champagne			

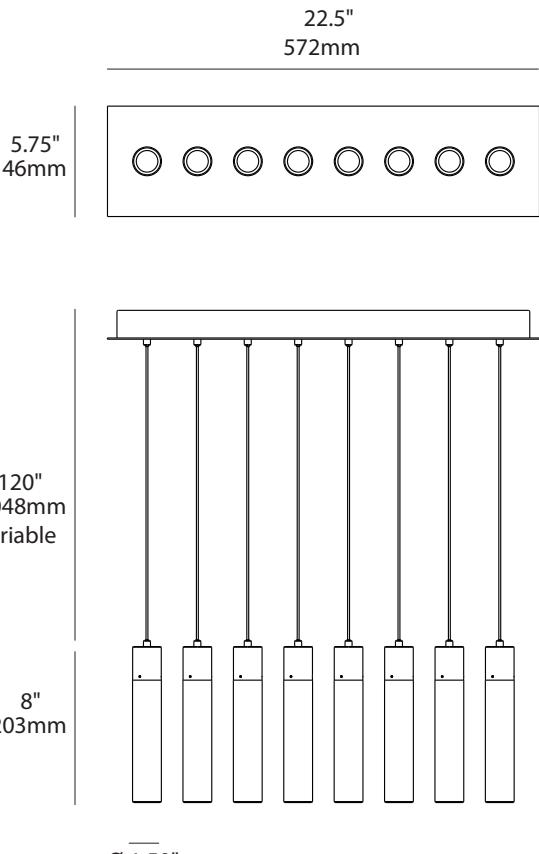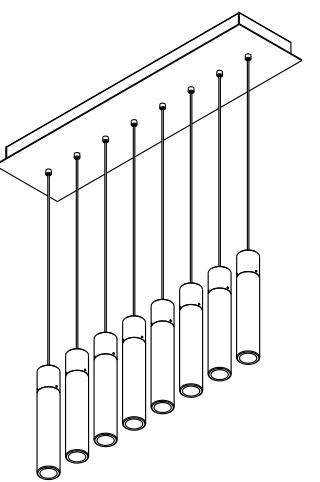

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution
Optics:





Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: P8A-

27 2700K	S silver	CD clear cylinder diffuse aperture	010 0-10V dimming
30 3000K	B black	SD satin cylinder diffuse aperture	
35 3500K	G gold	CC clear cylinder concentric aperture	
C champagne			

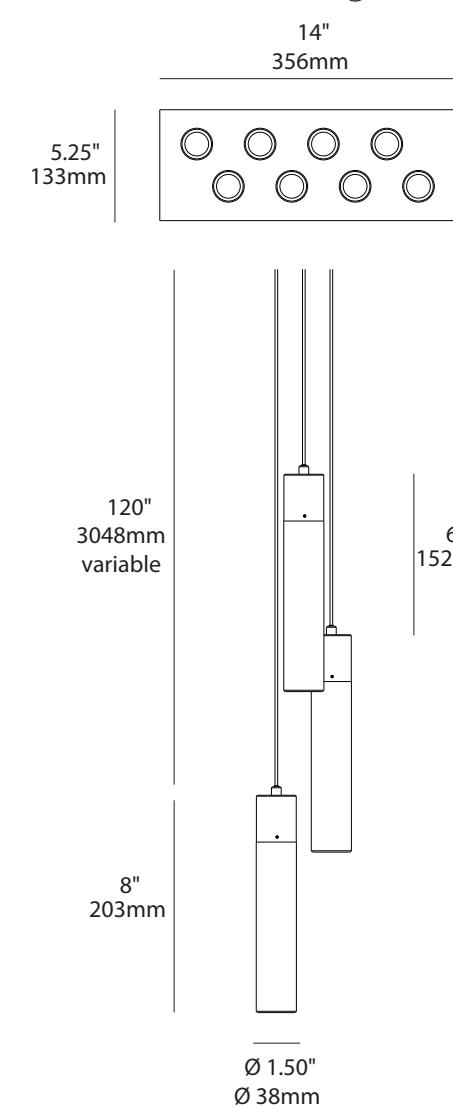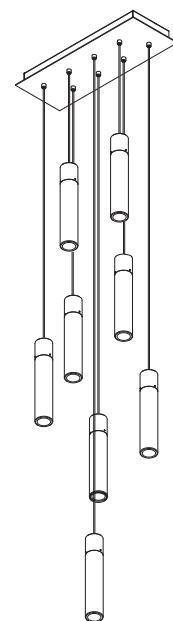

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.


Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:







Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: P6L-

27 2700K	S silver	CD clear cylinder diffuse aperture	010 0-10V dimming
30 3000K	B black	SD satin cylinder diffuse aperture	
35 3500K	G gold	CC clear cylinder concentric aperture	
	C champagne		

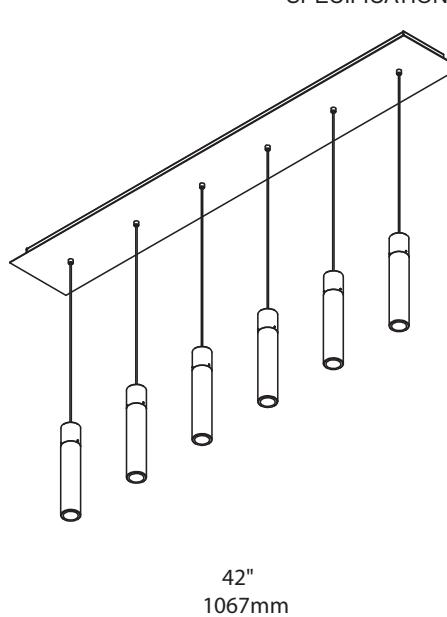

Ø 1.50"
Ø 38mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:







Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: P8L-

27 2700K	S silver	CD clear cylinder diffuse aperture	010 0-10V dimming
30 3000K	B black	SD satin cylinder diffuse aperture	
35 3500K	G gold	CC clear cylinder concentric aperture	

C champagne

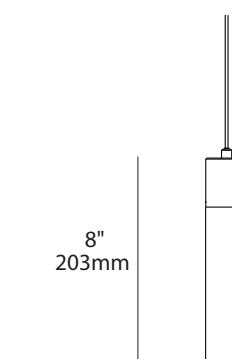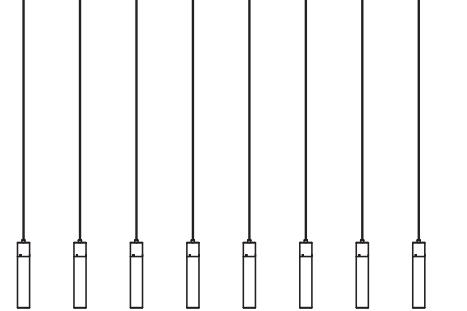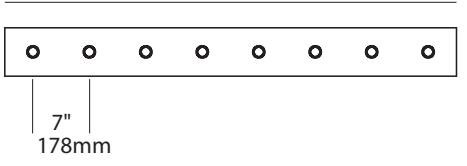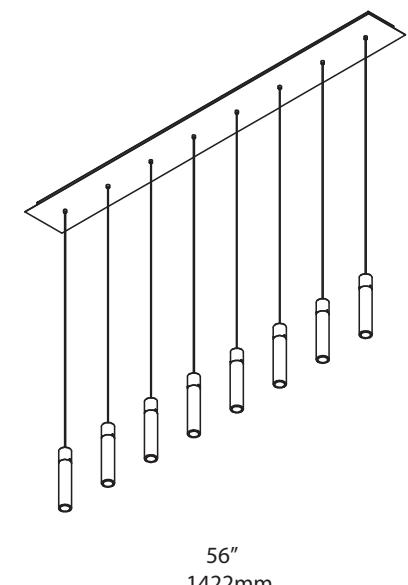

Ø 1.50"
Ø 38mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution
Optics:




Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)


Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code:

P11L-
27 2700K S silver CD clear cylinder diffuse aperture 010 0-10V dimming
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
C champagne

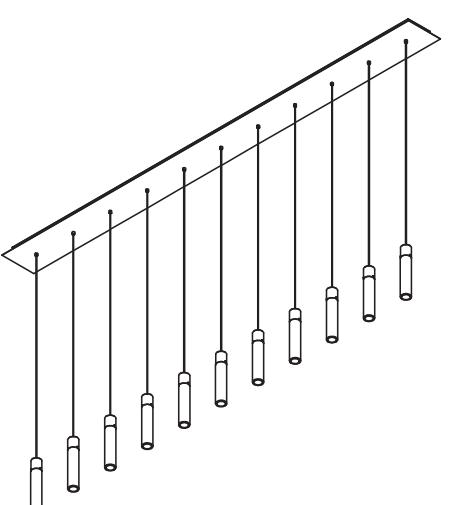


77"
1956mm

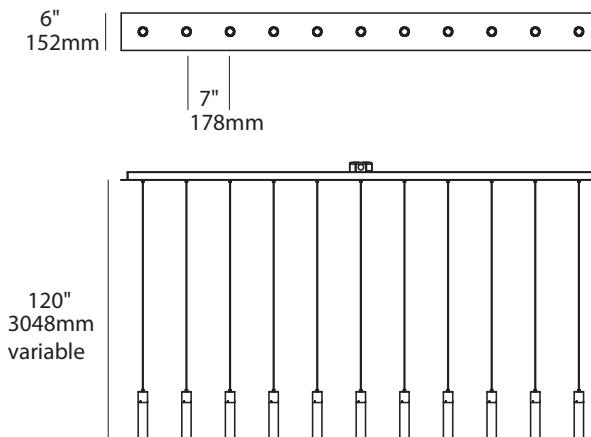

6"
152mm

7"
178mm

120"
3048mm
variable

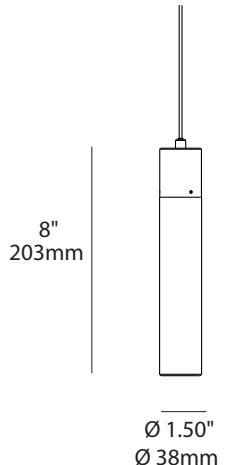

8"
203mm
Ø 1.50"
Ø 38mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution
Optics:




Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)


Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code:


P28-
27 2700K S silver CD clear cylinder diffuse aperture 010 0-10V dimming
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
C champagne

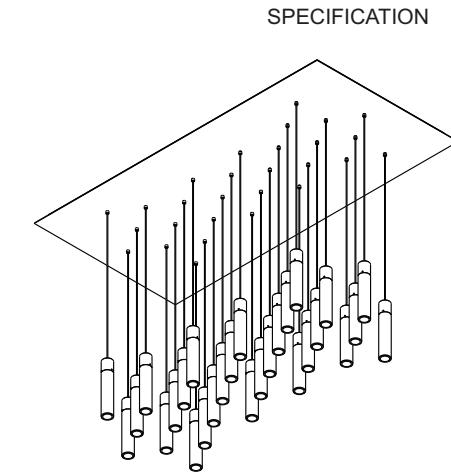


47.88"
1216mm

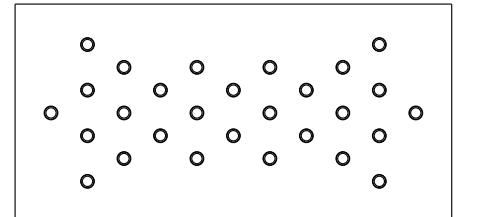

23.88"
606mm

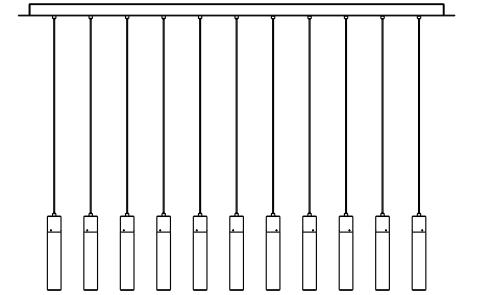

120"
3048mm
variable

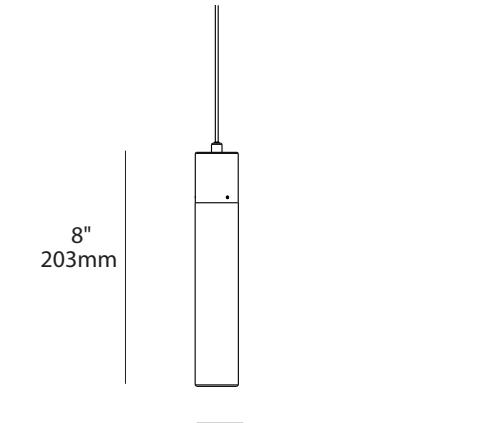

8"
203mm
Ø 1.50"
Ø 38mm

SPECIFICATION

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution
Optics:






Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: P30-

27 2700K	S silver	CD clear cylinder diffuse aperture	010 0-10V dimming
30 3000K	B black	SD satin cylinder diffuse aperture	
35 3500K	G gold	CC clear cylinder concentric aperture	
	C champagne		

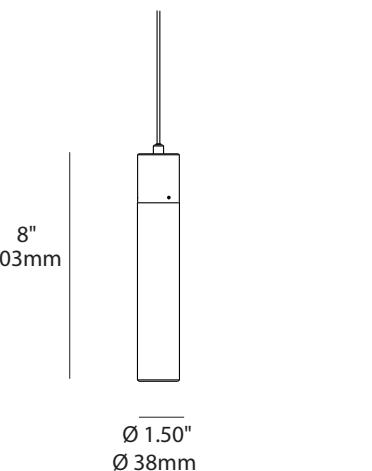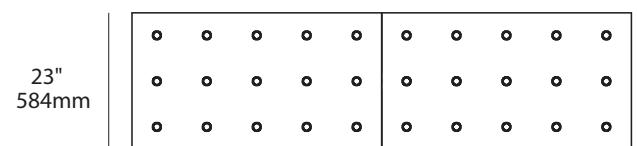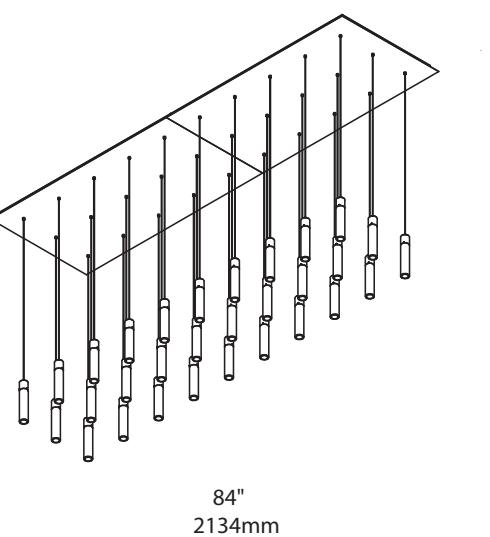

Description: High efficiency LED decorative wall mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others)



Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:


Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: W1D-
27 2700K S silver CD clear cylinder diffuse aperture
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
C champagne

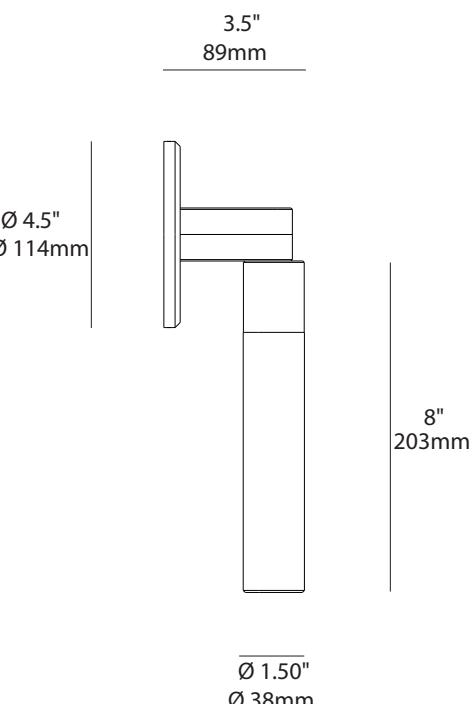

Description: High efficiency LED decorative wall mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others)




Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:


Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code: W1U-
27 2700K S silver CD clear cylinder diffuse aperture
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
C champagne



Description: High efficiency LED decorative wall mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others)

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:




Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code:

W2D- - -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne



Description: High efficiency LED decorative wall mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others)

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:




Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code:

W2U- - -
 27 2700K S silver CD clear cylinder diffuse aperture
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne



Description: High efficiency LED decorative wall mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others)

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:




Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)


Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code:

W2UD-
27 2700K S silver CD clear cylinder diffuse aperture
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
C champagne

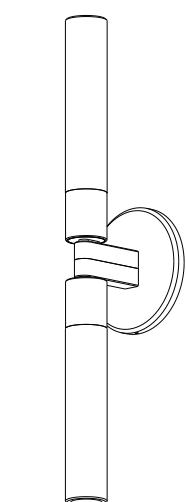

3.5"
89mm

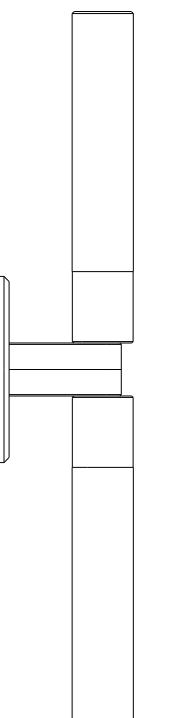

17.5"
445mm

Ø 4.5"
Ø 114mm

Ø 1.50"
Ø 38mm

Description: High efficiency LED decorative wall mount luminaire with machined aluminum housing and clear acrylic light control lens.


Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver, 120/277V 50/60Hz, (sold separate). See D8_700 series remote driver spec sheets for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others)

Metal finish: Clear anodized aluminum (S)
Black anodized aluminum (B)
Gold anodized aluminum (G)
Champagne anodized aluminum (C)

Light Distribution Optics:




Clear cylinder diffuse aperture (CD)
Satin cylinder diffuse aperture (SD)
Clear cylinder concentric aperture (CC)


Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8_700 series drivers.

Order Code:

W4-
27 2700K S silver CD clear cylinder diffuse aperture
30 3000K B black SD satin cylinder diffuse aperture
35 3500K G gold CC clear cylinder concentric aperture
C champagne

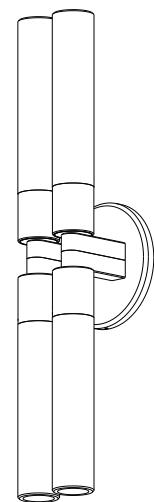


3.5"
89mm

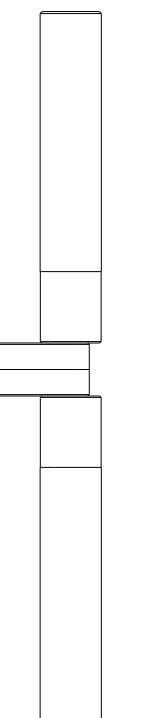

17.5"
445mm

Ø 1.50"
Ø 38mm




DRIVERS

Description: Remote Mounted Electronic Driver - Suitable for operation of 1 to 2 Archilume Ovolo dimmable lamp heads. Suitable for remote mounting up to 25 feet.

Electrical: 8 watt, 120-277V 50/60Hz input, 150mA constant current class 2 output. Class A sound rating. Short circuit protection. The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Compatible 0-10V
dimmers and switches:
Leviton IllumaTech - IP710-DLX
Lutron Nova T - NTFTV
Lutron Diva - DTV
Lutron Diva - NFTV
Watt Stopper DCLV1
Pass and Seymour (Legrand) CD4FB-W

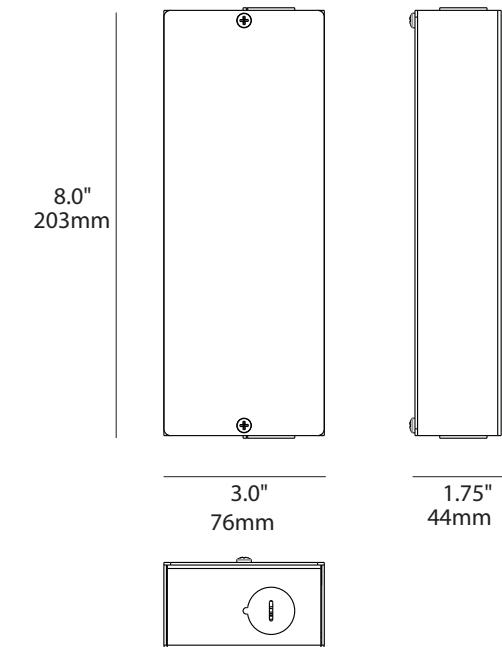

Compatible dimming
control systems:
Lutron GraphicEye - GRX-TVI w GRX3503
Lutron Energy Savr Node - QSN-4T16-S
Lutron TVM2 Module
Crestron GLX-DIMFLV8
Crestron GLXP-DIMFLV8
Crestron GLPAC-DIMFLV4-*
Crestron GLPAC-DIMFLV8-*
Crestron GLPP-DIMFLVEX-PM
Crestron GLPP-1DIMFLV2EX-PM
Crestron GLPP-1DIMFLV3EX-PM
Crestron DIN-AO8
Crestron DIN-4DIMFLV4
Crestron CLS-EXP-DIMFLV
Crestron CLCI-1DIMFLV2EX

Mounting: Mounts from inside box with (2) #10 screws (by others). Mounting holes are on the centerline on 6.75" (171mm) centers.

Remote Box Finish: Galvanized metal.

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: D8-150-010

Description: Remote Mounted Electronic Driver - Suitable for operation of 1 to 3 Archilume warm dimmable lamp heads. Suitable for remote mounting up to 25 feet.

Electrical: 15 watt, 120-277V 50/60Hz input, 250mA constant current class 2 output. Class A sound rating. Short circuit protection. The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Compatible 0-10V
dimmers and switches:
Leviton IllumaTech - IP710-DLX
Lutron Nova T - NTFTV
Lutron Diva - DTV
Lutron Diva - NFTV
Watt Stopper DCLV1
Pass and Seymour (Legrand) CD4FB-W

Compatible dimming
control systems:
Lutron GraphicEye - GRX-TVI w GRX3503
Lutron Energy Savr Node - QSN-4T16-S
Lutron TVM2 Module
Crestron GLX-DIMFLV8
Crestron GLXP-DIMFLV8
Crestron GLPAC-DIMFLV4-*
Crestron GLPAC-DIMFLV8-*
Crestron GLPP-DIMFLVEX-PM
Crestron GLPP-1DIMFLV2EX-PM
Crestron GLPP-1DIMFLV3EX-PM
Crestron DIN-AO8
Crestron DIN-4DIMFLV4
Crestron CLS-EXP-DIMFLV
Crestron CLCI-1DIMFLV2EX


Mounting: Mounts from inside box with (2) #10 screws (by others). Mounting holes are on the centerline on 6.75" (171mm) centers.

Remote Box Finish: Galvanized metal.

Approvals: Dry locations, approved to UL safety standards for luminaires.


Order Code: D8-250-010

Description: Remote Mounted Electronic Driver - Suitable for operation of 1 to 8 Archilume lamp heads. Suitable for remote mounting up to 25 feet.



Electrical: 20 watt, 120-277V 50/60Hz input, 700mA constant current class 2 output. Class A sound rating. Short circuit protection. The violet (positive) and gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Compatible 0-10V
dimmers and switches:
Leviton IllumaTech - IP710-DLX
Lutron Nova T - NTFTV
Lutron Diva - DTV
Lutron Diva - NFTV
Watt Stopper DCLV1
Pass and Seymour (Legrand) CD4FB-W

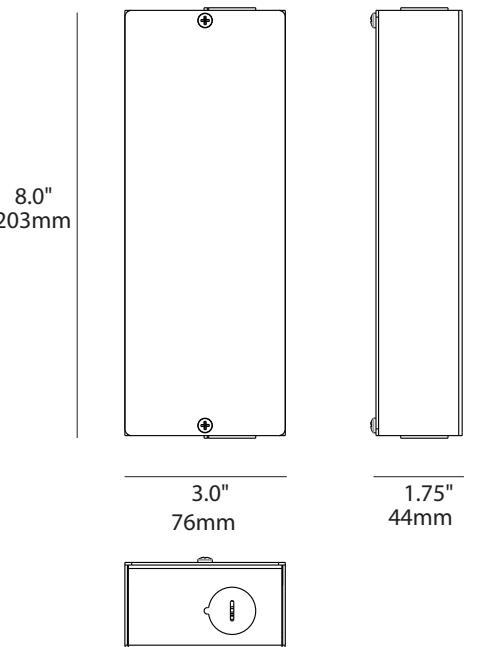

Compatible dimming
control systems:
Lutron GraphicEye - GRX-TVI w GRX3503
Lutron Energy Savr Node - QSN-4T16-S
Lutron TVM2 Module
Crestron GLX-DIMFLV8
Crestron GLXP-DIMFLV8
Crestron GLPAC-DIMFLV4-*
Crestron GLPAC-DIMFLV8-*
Crestron GLPP-DIMFLVEX-PM
Crestron GLPP-1DIMFLV2EX-PM
Crestron GLPP-1DIMFLV3EX-PM
Crestron DIN-A08
Crestron DIN-4DIMFLV4
Crestron CLS-EXP-DIMFLV
Crestron CLCI-1DIMFLV2EX

Mounting: Mounts from inside box with (2) #10 screws (by others). Mounting holes are on the centerline on 6.75" (171mm) centers.

Remote Box Finish: Galvanized metal.

Approvals: Dry locations, approved to UL safety standards for luminaires.

Order Code: D8-700-010

archilume

www.archilume.com