


Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens, 90 CRI, 2700K (warm white color temperature). Color consistent from LED to LED within a 3 step MacAdam ellipse.


Electrical: Constant current class 2 integral driver, 120V 50/60Hz input, 700mA constant current class 2 output. Class A sound rating. Short circuit protection. The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided with 4x 0.25" dia. holes on 11"x 3" centers. Mounts over 4" octagonal j-box (by others). 120"(3048mm) suspension cable provided standard. Field adjustable.

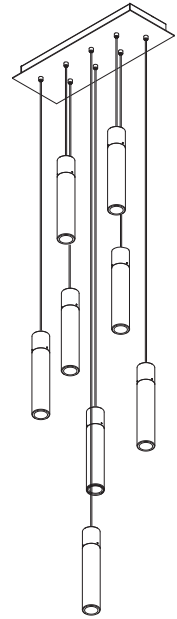

14"
356mm

5.25"
133mm



Metal finish: Clear anodized aluminum (Custom anodized finishes available)

Light Distribution Optics:



Diffuse
(standard)




Concentric
(optional)

Approvals: Dry locations, approved to UL safety standards for luminaires.

120"
3048mm
variable

6"
152mm

8"
203mm



Ø 1.50"
Ø 38mm